



Pak Alpha

WELCOME TO  
**Pak Alpha**

"BUILD. BOND.  
BEAUTIFY."

[www.thepakalpha.com](http://www.thepakalpha.com)




# MESSAGE From CEO

At Pak Alpha Manufacturing, I, Asadullah, take great pride in leading a company that thrives on growth and innovation. Our journey took a major step forward in 2023 with the launch of our manufacturing division, opening doors to new opportunities and global expansion. With a commitment to quality and excellence, we are dedicated to producing industry-leading solutions that meet international standards.

As we move forward, my vision is to establish Pak Alpha Manufacturing as a trusted name in the Gulf markets. We are focused on building strong partnerships and ensuring that our products continue to reflect the reliability and excellence our customers expect.








# Who Are We

## About Our Offerings

We manufacture high-quality tile bond, grout, tile grout, and wall putty, ensuring strong and lasting results for every project. Beyond construction, we also offer expert paper cutting and printing services, delivering precision and reliability for your business needs, Building strong foundations with quality and precision.





# Our Story

## Pak Alpha Manufacturing

Pak Alpha International has a rich and dynamic history of growth, innovation, and expansion across borders. The journey began in 2015 when the company was founded in Rawalpindi, Pakistan. From its early days, the company committed itself to excellence, offering high-quality products that quickly earned the trust of local businesses.

Building on this initial success, Pak Alpha International expanded its horizons in 2020 by opening its first international branch in Afghanistan. This strategic move allowed the company to tap into new markets and strengthen its presence across the region. With this expansion, Pak Alpha began supplying products to various companies in Central Asia, including those in Uzbekistan and Tajikistan, further establishing its reputation as a reliable and efficient supplier.







# Our **Success**

The year 2023 marked a pivotal chapter in the company's growth when Pak Alpha International launched its manufacturing division. This new endeavor set the stage for the company to broaden its reach even further, with plans to connect with Gulf countries and European markets. The focus on high-quality manufacturing, combined with a commitment to international business expansion, has placed Pak Alpha International on a strong trajectory toward becoming a key player in global markets.

Today, Pak Alpha International is more than just a business; it's a symbol of ambition, innovation, and global connectivity. With a proven track record and a clear vision for the future, the company is poised to make a lasting impact across industries and regions, building new partnerships and contributing to the growth of markets worldwide.

# Our PRODUCTS

## Comprehensive Offerings

### Tile Grout



A high-quality, durable solution designed to fill gaps between tiles, ensuring a seamless and long-lasting finish. Our grout is resistant to cracks, stains, and moisture, making it ideal for both residential and commercial spaces.

### Tile Bond



A strong and reliable adhesive designed for securing tiles firmly in place. Our high-performance tile bond ensures excellent grip, durability, and resistance to moisture, preventing tile displacement over time.

### Wall Putty



A smooth and durable base for flawless walls! Our high-quality wall putty fills cracks, evens out rough surfaces. It provides a strong, moisture-resistant layer that protects walls from peeling and dampness.

# Tile Grout

A strong and reliable adhesive designed for securing tiles firmly in place. Our high-performance tile bond ensures excellent grip, durability, and resistance to moisture, preventing tile displacement over time.

## ***Uses***

**Tile Grout** is suitable for use in areas ranging from residential to heavy commercial. Maybe used with all type of tile, ceramic, marble, slat, limestone and granite. It is suitable for use in commercial kitchens, food processing plants and residential floors, wall, swimming pools, shower and countertops.

## ***Advantages***

- Enhances the natural tile color.
- Resistant to cracks, shrinkage, and damage.
- Does not fade or discolor from chemicals.
- Perfect for pools and damp areas.
- Easy to apply with a smooth texture.
- Available in various color options.
- Forms durable, waterproof joints.
- Pre-mixed powder, just add water.

## ***Surface Preparation***

Tiles must be firmly attached to a sound subsurface and tile adhesive must be cured a minimum 24 hours prior to grout application. Remove any loose material or dust from tiles and joints.

## ***Mixing***

Dry-blend powder before use. Stir tile grout into clean water. Power mixes at less than 300 RPM until you get a stiff creamy consistency. Use approximately 4 parts grout to 1 part water by volume (2 – 3) liters per 10 kg bag. Avoid thinning at this will weaken the grout. pot life of mixed grout is approximately 2 hours.



## ***Application***

Lightly dampen tile with clean water before grouting. This makes grouting easier and the finished tile clear, highly porous tile will require additional wetting of the joints to prevent excessive water loss from the grout. Float held at approximately 45 degrees, work diagonally to joints using adequate pressure to ensure that grout bonds to subsurface and fills in joints. Remove as much excess grout possible from the surface of the tiles with edge of the rubber grout float. Allow grout to set-up approximately 10 to 20 minutes in joint. Soak sponge or cheese cloth with water. Rinse out excess water completely and wipe tiles clean using a circular motion. Rinse sponge and rinse out frequently and keep water supply clean. Joints should become smooth and level with edges of tile. Allow installation to dry for approximately 30 to 45 minutes or until a haze forms on tile and the grout in the joints sets firm. Use a soft, and clean dry cloth polish off haze and dry remaining grout residue.

## ***Curing***

Proper curing is necessary for grout to achieve maximum strength. After final soft cloth polishing, wait 2 to 4 hours, then lightly dampen installation with clean, cool water and cover entire surface for a minimum 3 days with Kraft tape paper with edges lapped. If this is impractical, lightly mist grout several times a day for 3 days.

## ***Guarantee***

The information given is based on knowledge and performance of the material. Every precaution is taken in the manufacturing of the product and the responsibility is limited to the quality of supplies, with no guarantee of results in the field, as Pak Alpha has no control over site conditions or execution of work.



# Tile Bond

A high-quality, durable solution designed to fill gaps between tiles, ensuring a seamless and long-lasting finish. Our grout is resistant to cracks, stains, and moisture, making it ideal for both residential and commercial spaces.

## ***Uses***

**Tile Bond** is ideal for both residential and heavy commercial applications. It works effectively with various tile types, including ceramic, marble, slate, limestone, and granite. Suitable for use in commercial kitchens, food processing plants, and residential spaces, it ensures strong adhesion for floors, walls, swimming pools, showers, and countertops.

## ***Advantages***

- Provides a strong tile bond.
- Does not crack or shrink.
- Resistant to water and moisture.
- Withstands chemicals and stains.
- Suitable for pools and wet areas.
- Smooth and easy to spread.
- Available in multiple colors.
- Works on various surfaces.
- Pre-mixed, just add water.

## ***Surface Preparation***

The surface must be clean, dry, and free from dust, grease, or loose particles.

Tiles should be properly set and cured for at least 24 hours before applying Tile Bond.

## ***Mixing***

Dry-mix powder before use. Add Tile Bond to clean water and mix at low speed (less than 300 RPM) until a smooth, lump-free paste forms. Use approximately 3–4 parts powder to 1 part water by volume (2–3 liters per 10 kg bag). Avoid excess water, as it weakens the bond. Pot life of mixed Tile Bond is around 2 hours

## ***Application***

Apply Tile Bond to the prepared surface using a notched trowel. Spread evenly while holding the trowel at a 45-degree angle to ensure proper adhesion. Press tiles firmly into place, slightly twisting them to ensure full contact with the adhesive. Remove excess adhesive from joints before it dries. Allow the tiles to set for 10 to 20 minutes, then clean the surface with a damp sponge, rinsing frequently to keep water clean. Let the installation dry for 30 to 45 minutes. Once a haze forms, polish with a soft, dry cloth to remove any residue.

## ***Curing***

Proper curing is essential for Tile Bond to reach full strength. After the final cleaning, allow the installation to set for 2 to 4 hours. Then, lightly mist the surface with clean water and cover it with Kraft paper for at least 3 days. If covering is not possible, mist the bonded tiles several times a day for 3 days to ensure proper curing.

## ***Guarrantee***

The information given is based on knowledge and performance of the material. Every precaution is taken in the manufacturing of the product and the responsibility is limited to the quality of supplies, with no guarantee of results in the field, as Pak Alpha has no control over site conditions or execution of work.



# Wall Putty

A smooth and durable base for flawless walls! Our high-quality wall putty fills cracks, evens out rough surfaces. It provides a strong, moisture-resistant layer that protects walls from peeling and dampness

## ***Uses***

**Wall Putty** is suitable for use in both residential and commercial spaces. It can be applied on various surfaces, including concrete, plaster, and drywall. Ideal for interior and exterior walls, it provides a smooth finish for painting. It is suitable for homes, offices, commercial buildings, and industrial projects, ensuring durability and a flawless surface.

## ***Advantages***

- Provides a smooth wall finish.
- Prevents cracks and flaking.
- Resistant to moisture and dampness.
- Enhances paint durability.
- Easy to apply and sand.
- Suitable for interior and exterior.
- Offers strong surface adhesion.
- Pre-mixed, just add water.

## ***Surface Preparation***

The surface must be clean, dry, and free from dust, grease, or loose particles. Any cracks or holes should be filled and leveled before applying Wall Putty. Ensure the wall is properly cured and free from moisture for the best results.

## ***Mixing***

Dry-mix powder before use. Add Wall Putty to clean water and mix at low speed (less than 300 RPM) until a smooth, lump-free paste forms. Use approximately 2–3 parts powder to 1 part water by volume (2–3 liters per 10 kg bag). Avoid excess water, as it weakens the strength. Pot life of mixed Wall Putty is around 2 hours.

## ***Application***

Apply Wall Putty to the prepared surface using a putty knife or trowel, holding it at a slight angle for smooth application. Spread evenly in thin layers, covering the entire surface without leaving gaps or ridges. Allow the first coat to dry for 3 to 4 hours before applying a second coat if required. For best results, apply the second coat in the opposite direction of the first to ensure even coverage. Once fully dry, use fine-grit sandpaper to smooth the surface, removing any imperfections. Wipe off dust with a clean, dry cloth before proceeding with painting or further finishing.

## ***Curing***

Proper curing is essential for Wall Putty to achieve maximum strength. After the final coat has dried, allow it to set for 24 hours before sanding or painting. Lightly mist the surface with clean water if needed to prevent rapid drying, especially in hot or dry conditions. For best results, let the putty cure naturally for at least 3 days before applying paint or finishing coats.

## ***Guarrantee***


The information given is based on knowledge and performance of the material. Every precaution is taken in the manufacturing of the product and the responsibility is limited to the quality of supplies, with no guarantee of results in the field, as Pak Alpha has no control over site conditions or execution of work.





# OUR VARIATIONS

Pak Alpha Manufacturing offers a variety of tile grout shades to complement different tile designs, whether you want a subtle blend or a bold contrast.

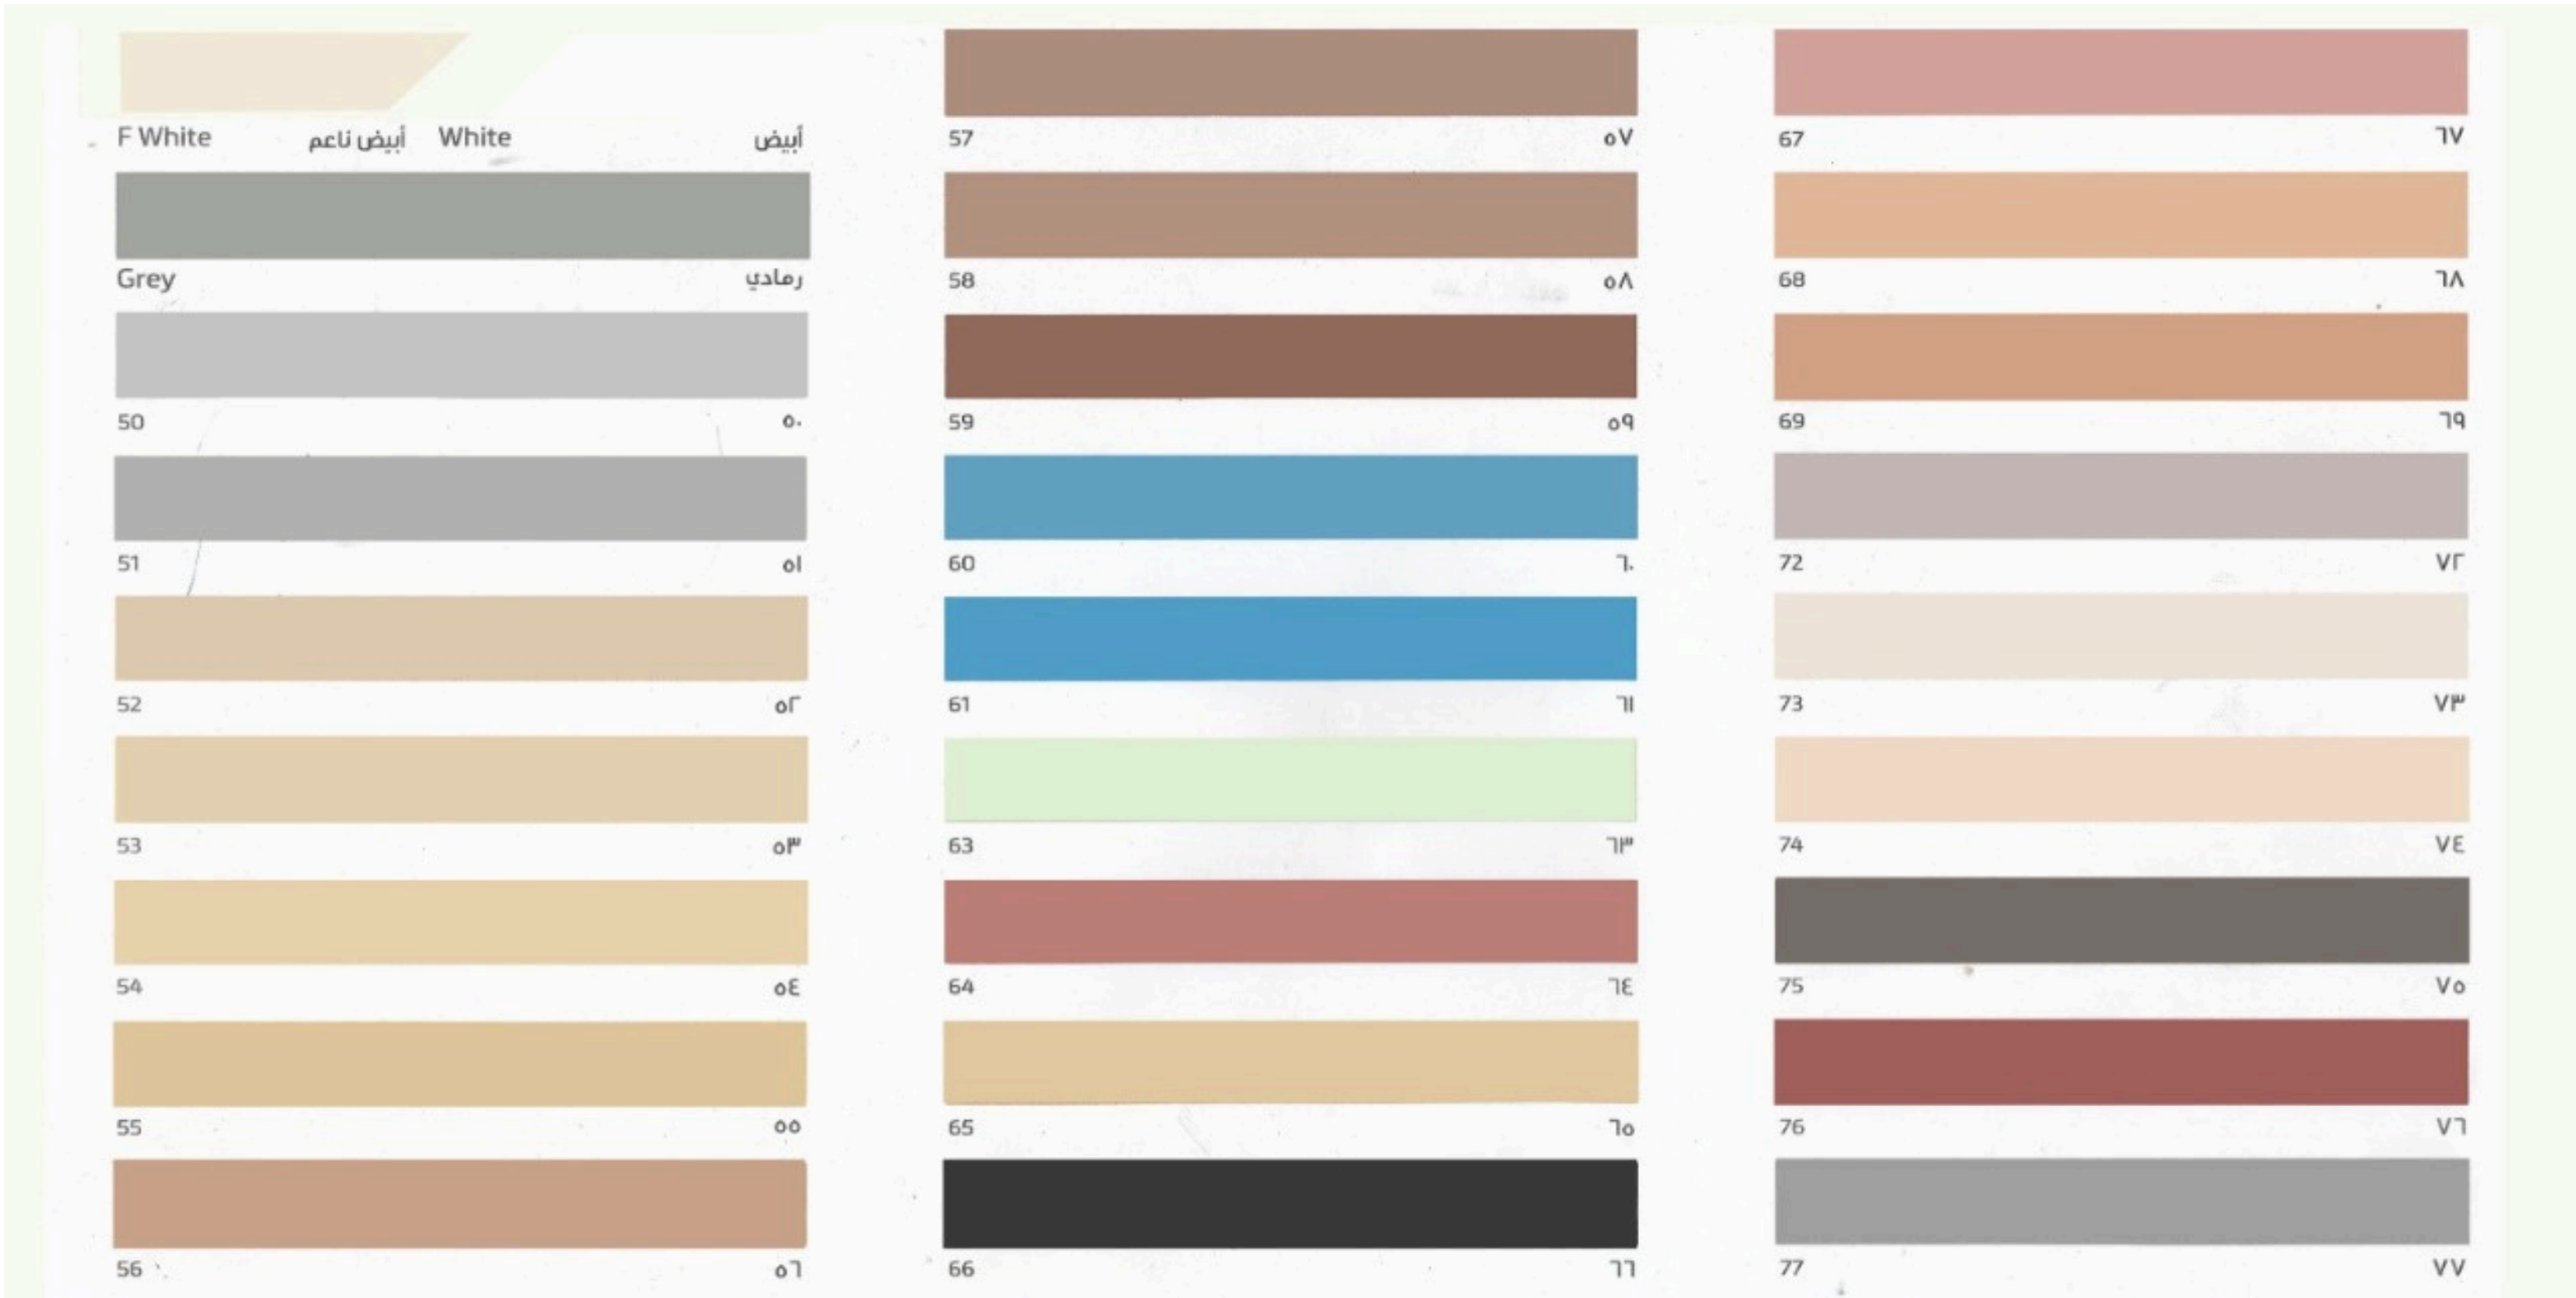

# Contact US

## Get in Touch

We welcome inquiries for new projects and collaborations. Reach out to us today!



Address:

Al-Kharj Industrial City,  
Modon, Riyadh



Phone:

+966 57 490 5755  
+966 53 764 1287

